

# Grasshopper<sup>®</sup> 3

HIGH PERFORMANCE CCD + CMOS

**POINT GREY**  
Innovation in Imaging

Model	Version	MP	Imaging Sensor
GS3-U3-14S5C-C	Color	1.4 MP	<ul style="list-style-type: none"> <li>Sony ICX285, 2/3", 6.45 μm</li> <li>Global shutter</li> <li>30 FPS at 1384 x 1036</li> </ul>
GS3-U3-14S5M-C	Mono		
GS3-U3-15S5C-C	Color	1.4 MP	<ul style="list-style-type: none"> <li>Sony ICX825, 2/3", 6.45 μm</li> <li>Global shutter</li> <li>45 FPS at 1384 x 1032</li> </ul>
GS3-U3-15S5M-C	Mono		
GS3-U3-23S6C-C	Color	2.3 MP	<ul style="list-style-type: none"> <li>Sony IMX174, 1/1.2", 5.86 μm</li> <li>Global shutter</li> <li>163 FPS at 1920 x 1200</li> </ul>
GS3-U3-23S6M-C	Mono		
GS3-U3-28S4C-C	Color	2.8 MP	<ul style="list-style-type: none"> <li>Sony ICX687, 1/1.8", 3.69 μm</li> <li>Global shutter</li> <li>26 FPS at 1928 x 1448</li> </ul>
GS3-U3-28S4M-C	Mono		
GS3-U3-28S5C-C	Color	2.8 MP	<ul style="list-style-type: none"> <li>Sony ICX674, 2/3", 4.54 μm</li> <li>Global shutter</li> <li>26 FPS at 1920 x 1440</li> </ul>
GS3-U3-28S5M-C	Mono		
GS3-U3-32S4C-C	Color	3.2 MP	<ul style="list-style-type: none"> <li>Sony IMX252, 1/1.8", 3.45 μm</li> <li>Global shutter</li> <li>121 FPS at 2048 x 1536</li> </ul>
GS3-U3-32S4M-C	Mono		
GS3-U3-41C6C-C	Color	4.1 MP	<ul style="list-style-type: none"> <li>CMOSIS CMV4000-3E5, 1", 5.5 μm</li> <li>Global shutter</li> <li>90 FPS at 2048 x 2048</li> </ul>
GS3-U3-41C6M-C	Mono		
GS3-U3-41C6NIR	Mono NIR	4.1 MP	<ul style="list-style-type: none"> <li>CMOSIS CMV4000-3E12, 1", 5.5 μm</li> <li>Global shutter</li> <li>90 FPS at 2048 x 2048</li> </ul>
GS3-U3-41S4C-C	Color	4.1 MP	<ul style="list-style-type: none"> <li>Sony ICX808, 1/1.8", 3.1 μm</li> <li>Global shutter</li> <li>18 FPS at 2016 x 2016</li> </ul>
GS3-U3-41S4M-C	Mono		
GS3-U3-50S5C-C	Color	5.0 MP	<ul style="list-style-type: none"> <li>Sony ICX625, 2/3", 3.45 μm</li> <li>Global shutter</li> <li>15 FPS at 2448 x 2048</li> </ul>
GS3-U3-50S5M-C	Mono		
GS3-U3-51S5C-C	Color	5.0 MP	<ul style="list-style-type: none"> <li>Sony IMX250, 2/3", 3.45 μm</li> <li>Global shutter</li> <li>75 FPS at 2448 x 2048</li> </ul>
GS3-U3-51S5M-C	Mono		
GS3-U3-60S6C-C	Color	6.0 MP	<ul style="list-style-type: none"> <li>Sony ICX694, 1", 4.54 μm</li> <li>Global shutter</li> <li>13 FPS at 2736 x 2192</li> </ul>
GS3-U3-60S6M-C	Mono		
GS3-U3-60QS6C-C	Color	6.0 MP	<ul style="list-style-type: none"> <li>Sony ICX694, 1", 4.54 μm</li> <li>Global shutter</li> <li>25 FPS at 2736 x 2192</li> </ul>
GS3-U3-60QS6M-C	Mono		
GS3-U3-89S6C-C	Color	8.9 MP	<ul style="list-style-type: none"> <li>Sony IMX255, 1", 3.45 μm</li> <li>Global shutter</li> <li>43 FPS at 4096 x 2160</li> </ul>
GS3-U3-89S6M-C	Mono		
GS3-U3-91S6C-C	Color	9.1 MP	<ul style="list-style-type: none"> <li>Sony ICX814, 1", 3.69 μm</li> <li>Global shutter</li> <li>9 FPS at 3376 x 2704</li> </ul>
GS3-U3-91S6M-C	Mono		
GS3-U3-120S6C-C	Color	12 MP	<ul style="list-style-type: none"> <li>Sony ICX834, 1", 3.1 μm</li> <li>Global shutter</li> <li>7 FPS at 4240 x 2824</li> </ul>
GS3-U3-120S6M-C	Mono		
GS3-U3-123S6C-C	Color	12.3 MP	<ul style="list-style-type: none"> <li>Sony IMX253, 1.1", 3.45 μm</li> <li>Global shutter</li> <li>30 FPS at 4096 x 3000</li> </ul>
GS3-U3-123S6M-C	Mono		


**USB<sup>™</sup>**  
VISION



- USB 3.0 for bandwidth, ease of use, and cost effectiveness
- Variety of high-resolution large format CCD and CMOS sensors
- FPGA and frame buffer-based architecture for optimal reliability

The high performance Grasshopper3 camera line combines the benefits of CCD with the affordability and data throughput of USB 3.0. Its FPGA and frame buffer-based architecture provides optimal reliability, a rich set of features, and a full image processing pipeline including color interpolation, gamma, and lookup table functionality. The Grasshopper3 offers a powerful, easy-to-use, and cost-effective alternative to Camera Link and dual GigE LAG solutions.

Imaging Performance (EMVA 1288)	See the <a href="#">Imaging Performance Specification</a> , which includes quantum efficiency, saturation capacity (full well depth), read noise, dynamic range and signal to noise ratio.
A/D Converter	14-bit (10-bit GS3-U3-41C6, 10- and 12-bit GS3-U3-23S6, GS3-U3-32S4, GS3-U3-51S5, GS3-U3-89S6, GS3-U3-123S6)
Video Data Output	8, 12, 16 and 24-bit digital data
Image Data Formats	Mon08, Mono12, Mono16 (all models) RGB, YUV411, YUV422, YUV444, Raw8, Raw12, Raw16 (color models)
Partial Image Modes	Pixel binning and region of interest (ROI) modes
Image Processing	Gamma, lookup table, hue, saturation, and sharpness
Shutter	Global shutter; Automatic/manual/one-push/extended shutter modes Up to 32 seconds (GS3-U3-28S5, GS3-U3-41S4, GS3-U3-50S5, GS3-U3-60S6, GS3-U3-89S6, GS3-U3-91S6, GS3-U3-123S6); up to 30 seconds (GS3-U3-28S4); up to 4 seconds (GS3-U3-14S5, GS3-U3-15S5, GS3-U3-32S4, GS3-U3-41C6, GS3-U3-51S5, GS3-U3-120S6); up to 3.2 seconds (GS3-U3-23S6)
Gain	Automatic/manual/one-push modes -3.66 dB to 24 dB GS3-U3-14S5; -1.583 dB to 24 dB GS3-U3-15S5; 0 dB to 24 dB GS3-U3-23S6/GS3-U3-28S4/GS3-U3-28S5; 0 dB to 47.9 dB GS3-U3-32S4; 0 to 10.1 dB GS3-U3-41C6; -7.742 dB to 24 dB GS3-U3-41S4; -6.51 dB to 24 dB GS3-U3-50S5; 0 dB to 48 dB GS3-U3-51S5, GS3-U3-89S6, GS3-U3-123S6; -6.158 to 24 dB GS3-U3-60S6; -9 to 24 dB GS3-U3-91S6; -5.455 dB to 24 dB GS3-U3-120S6
Gamma	0.50 to 4.00, programmable lookup table
White Balance	Automatic/manual/one-push modes
High Dynamic Range	Cycle 4 gain and exposure presets
Color Processing	On-camera in YUV or RGB format, or on-PC in Raw format
Digital Interface	USB 3.0 interface with screw locks for camera control, data, and power
Transfer Rates	5 Gbit/s
GPIO	8-pin Hirose HR25 GPIO connector for power, trigger, strobe, PWM, and serial I/O, 1 opto-isolated input, 1 opto-isolated output, 2 bi-directional I/O pins
External Trigger Modes	Standard, bulb, low smear (CCD only), overlapped, and multi shot trigger modes
Image Buffer	128 MB frame buffer
Memory Channels	2 user configuration sets for custom camera settings
Flash Memory	2 MB non-volatile memory
Dimensions	44 mm x 29 mm x 58 mm excluding lens holder, without optics (metal case)
Mass	90 grams (without optics or tripod mounting bracket)
Power Consumption	5 V via USB 3.0 or 8-24 V via GPIO (external power is recommended)
Camera Control	Via FlyCapture SDK or third party software
Camera Updates	In-field firmware updates
Lens Mount	C-mount
Temperature	Operating: 0° to 50°C; Storage: -30° to 60°C
Humidity	Operating: 20 to 80% (no condensation); Storage: 20 to 95% (no condensation)
Compliance	CE, FCC, RoHS
Operating System	Windows, Linux (32- or 64-bit)
Warranty	3 years

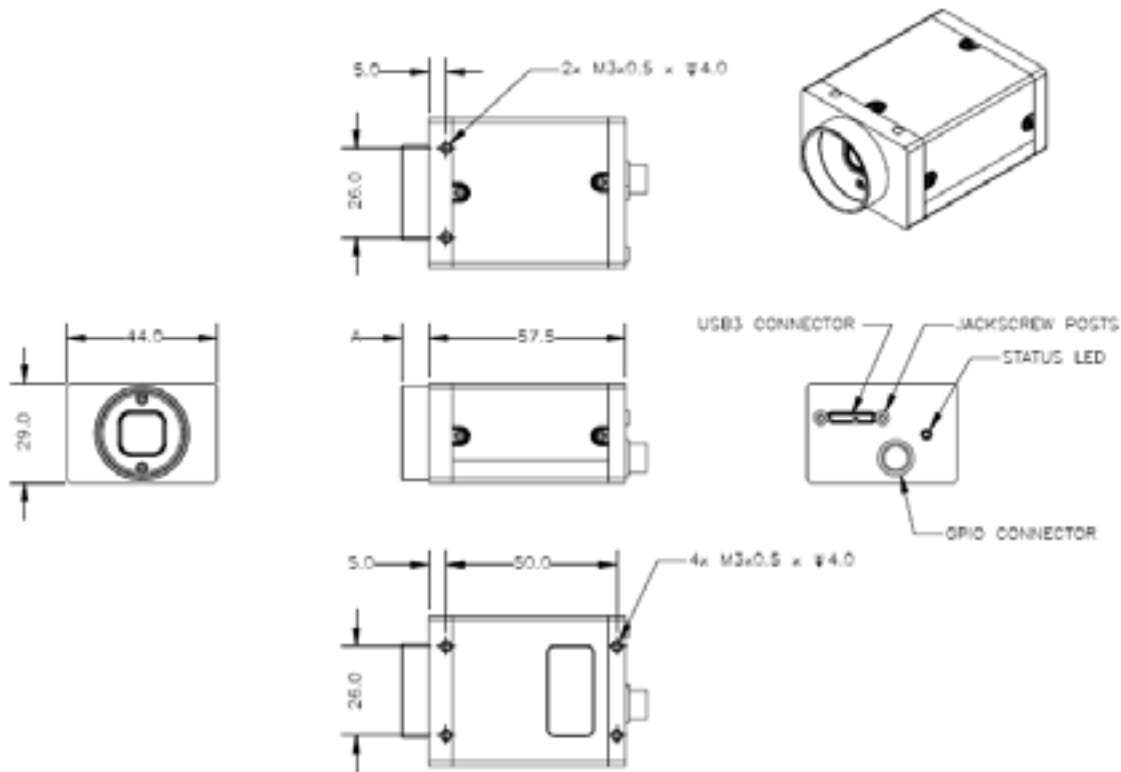

Dimensions are approximate measurements in mm.  
 The contents of this document are subject to change.  
 For questions or additional information,  
 contact [support@ptgrey.com](mailto:support@ptgrey.com)

**Grasshopper3  
 GS3-U3**

Copyright 2012  
 Point Grey Research Inc.  
 All rights reserved.  
 Revised: 2013/02/13



**CANADA (Headquarters)**

Point Grey Research, Inc.

12051 Riverside Way  
 Richmond, BC, Canada  
 V6W 1K7

T: +1 866.765.0827 (toll free)

T: +1 604.242.9937

F: +1 604.242.9938

E: [sales@ptgrey.com](mailto:sales@ptgrey.com)

[www.ptgrey.com](http://www.ptgrey.com)

[www.ptgreystore.com](http://www.ptgreystore.com)

**USA**

T: +1 866.765.0827 (toll free)

E: [na-sales@ptgrey.com](mailto:na-sales@ptgrey.com)

**EUROPE**

T: +49 7141 488817-0

F: +49 7141 488817-99

E: [eu-sales@ptgrey.com](mailto:eu-sales@ptgrey.com)

**CHINA**

T: +86 10 8215 9938

F: +86 10 8215 9936

E: [chinasales@ptgrey.com](mailto:chinasales@ptgrey.com)

[www.ptgreychina.com](http://www.ptgreychina.com)

**ASIA**

E: [asia-sales@ptgrey.com](mailto:asia-sales@ptgrey.com)

**DISTRIBUTORS**

**JAPAN**–ViewPLUS Inc. ([www.viewplus.co.jp](http://www.viewplus.co.jp))

**KOREA**–CYLOD Co., Ltd. ([www.cylod.com](http://www.cylod.com))

**CHINA**–LUSTER LightVision ([www.lusterinc.com](http://www.lusterinc.com))

**SINGAPORE, THAILAND, MALAYSIA**–Voltrium Systems ([www.voltrium.com.sg](http://www.voltrium.com.sg))

**TAIWAN**–Apo Star Co., Ltd. ([www.apostar.com.tw](http://www.apostar.com.tw))

**UNITED KINGDOM AND IRELAND**–ClearView Imaging ([www.clearviewimaging.co.uk](http://www.clearviewimaging.co.uk))